

PRODUCT DATASHEET

Module design, free combination
HYD-GU10A-7W-6500K



Application

- Showroom
- clothing store
- Hotel
- Living room
- Decorative and accent lighting

Benefits

- Nickel color, stylish and versatile
- PMMA lens, large transmittance, bright light
- Ra>80, high color rendering index, restore natural color

Features



- Warranty 3 years
- Module design, free combination
- Seiko aluminum, good corrosion resistance and heat dissipation

Electrical Data

Nominal wattage (W)	7W
Nominal Voltage (V)	220
Mains Frequency (Hz)	50
Nominal Current (mA)	61.1
Power Factor λ	0.5
Operating mode	DOB

Photometrical data


Luminous flux $\pm 10\%$ (lm)	798 lm
Luminous efficacy	116 lm/w
Color temperature	6500K
Light color (designation)	Cold White
Color rendering index Ra	≥ 80
Standard deviation of color matching	≤ 5 SDCM
Luminous intensity/cd	2058
Flickering	Flicker free
Beam angle	27 °

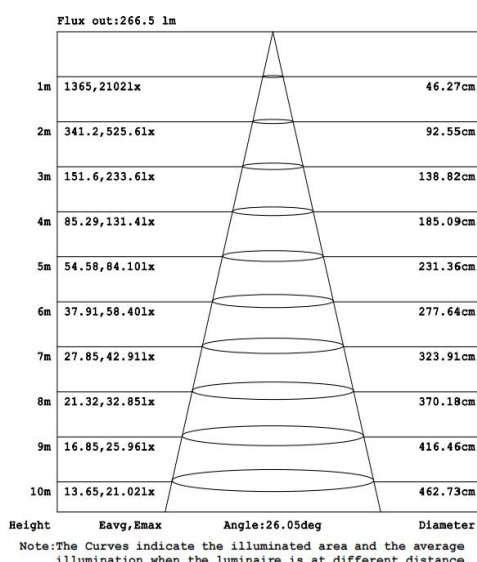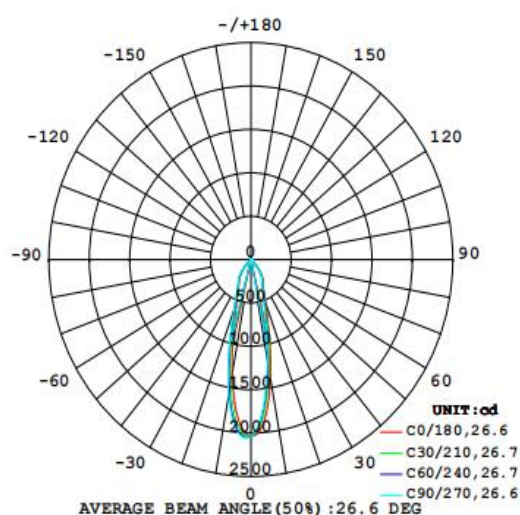

IES

Dimensions & Weight

Diameter (mm)	48
Height (mm)	65
Product weight (g)	55

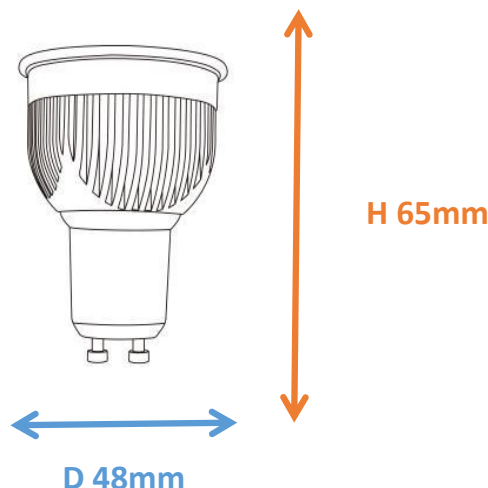

Material & Colors

Product color	Gray Housing and White Lamp
Housing color	Gray
Body material	Aluminum
LGP material	PMMA
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-20°C - +60 °C
Temperature range at storage	-25°C - +60 °C
Type of connection	Screwless terminal
Type of protection	IP20
Dimmable	No
Mounting type	Don't open the hole
Mounting location	Ceiling / Wall
Application environment	Indoor
Cut size (mm)	No
LED module replaceable	Not replaceable
With light source	Yes

Certificates & Lifespan

Life (h)	30,000
Certificates	CB CE LVD EMC
Standards	ISO9001:2015

Logistical Data

Product code	Dimensions (L*W*H)	Pcs/ carton	G.W. kg	Volume CBM
HYD-GU10A-7W

Installation Method



Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.