
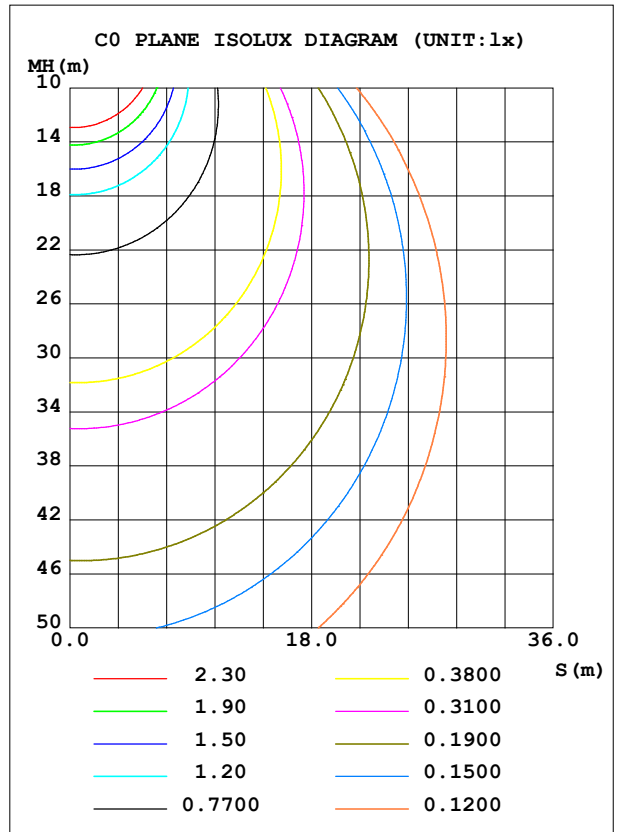


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.42V I:0.0885A P:11.589W PF:0.5683 Freq:50.00Hz Lamp Flux:1050.99x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 白光	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 90.69 lm/W
MODEL	P8	I <sub>max</sub> (cd)	372.2	S/MH (C0/180)	1.19	
NOMINAL POWER (W)	12	LOR (%)	100.0	S/MH (C90/270)	1.25	
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	1051.0	η UP, DN (C0-180)	0.0, 49.6	
NOMINAL FLUX (lm)	1050.99	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 50.4	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25	
TEST VOLTAGE (V)	230	η down (%)	100.0	CIBSE SHR MAX	1.35	

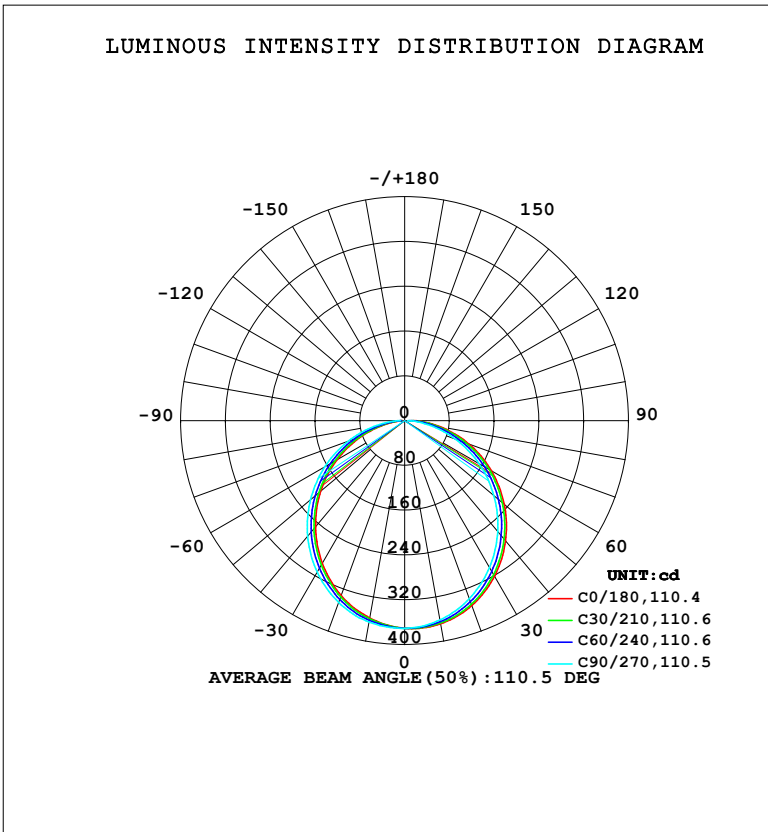

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature: 25.3°C  
Operators: DAMIN  
Test Date: 2024-11-12

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
Humidity: 65.0%  
Test Distance: 9.401m [K=1.0000]  
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum, lamp
10	368.5	366.5	361.7	359.2	358.0	360.4	365.3	368.4	0- 10	35.05	35.05	3.34,3.34
20	351.4	348.4	338.3	332.7	332.4	335.5	345.5	351.0	10- 20	99.98	135.0	12.8,12.8
30	321.2	316.6	303.1	295.0	294.4	299.1	312.5	320.7	20- 30	150.3	285.3	27.1,27.1
40	280.5	274.8	258.8	248.7	247.9	253.8	269.5	279.8	30- 40	179.5	464.9	44.2,44.2
50	232.1	225.5	207.9	196.3	195.5	202.1	219.5	231.3	40- 50	184.9	649.8	61.8,61.8
60	179.3	171.1	153.4	140.0	139.0	147.0	164.3	178.3	50- 60	167.1	816.9	77.7,77.7
70	122.1	113.7	95.96	82.65	81.30	89.35	106.8	121.1	60- 70	129.1	945.9	90,90
80	65.22	57.44	41.72	30.55	28.56	35.52	50.67	64.30	70- 80	77.74	1024	97.4,97.4
90	15.61	9.425	5.614	4.757	4.889	5.128	7.526	12.36	80- 90	27.32	1051	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 558.16 lm

%lum = 53.1%

%lamp = 53.1%

Conical surface Flux(130deg): 887.21 lm

%lum = 84.4%


%lamp = 84.4%

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2024-11-12

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.401m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:230.42V I:0.0885A P:11.589W PF:0.5683 Freq:50.00Hz Lamp Flux:1050.99x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 白光	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

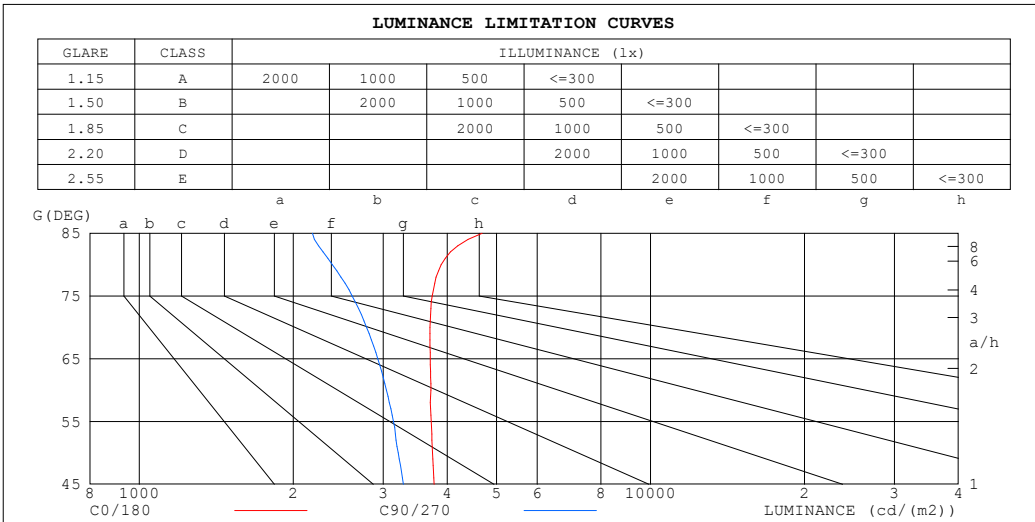

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	4681	2180
80	3895	2384
75	3740	2607
70	3704	2784
65	3706	2927
60	3719	3045
55	3721	3141
50	3745	3210
45	3770	3285


C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2024-11-12

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.401m [K=1.0000]  
 Remarks:

**CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM**

Test:U:230.42V I:0.0885A P:11.589W PF:0.5683 Freq:50.00Hz Lamp Flux:1050.99x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 白光	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio      Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.03	.99	.95	1.01	.97	.93	.97	.94	.90	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.77	.88	.82	.76	.84	.79	.74	.81	.77	.73	.78	.74	.71	.69
3.0	.79	.71	.64	.77	.70	.63	.74	.68	.62	.72	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.68	.60	.54	.66	.59	.53	.64	.57	.52	.61	.56	.52	.49
5.0	.62	.53	.47	.61	.53	.46	.59	.52	.46	.57	.50	.45	.55	.49	.45	.43
6.0	.56	.47	.41	.55	.47	.40	.53	.46	.40	.52	.45	.40	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.35	.47	.40	.35	.46	.40	.35	.33
8.0	.46	.38	.32	.46	.38	.32	.44	.37	.32	.43	.36	.31	.42	.36	.31	.29
9.0	.43	.34	.29	.42	.34	.29	.41	.34	.29	.40	.33	.28	.39	.33	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.26	.24

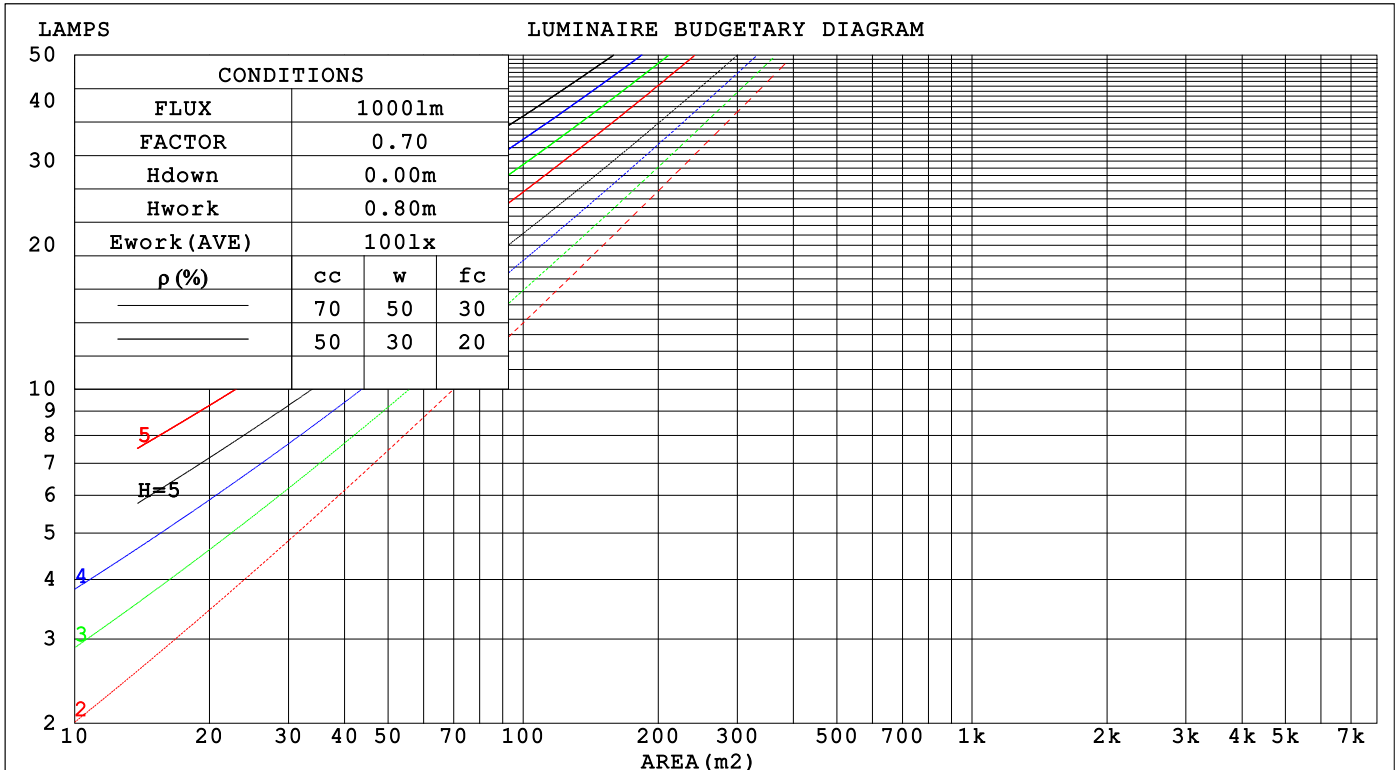

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2024-11-12

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.401m [K=1.0000]  
 Remarks:

WEC AND CCEC

Test:U:230.42V I:0.0885A P:11.589W PF:0.5683 Freq:50.00Hz		
Lamp Flux:1050.99x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 白光	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

$\rho_{CC}$	80%			70%			50%			30%			10%			0
$\rho_w$	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
$\rho_{fc}$	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.319	.181	.057	.312	.178	.056	.298	.171	.055	.286	.165	.053	.275	.159	.051	
2.0	.297	.163	.050	.290	.160	.049	.279	.155	.048	.268	.150	.047	.258	.146	.046	
3.0	.273	.145	.044	.268	.143	.043	.257	.139	.042	.248	.136	.042	.239	.132	.041	
4.0	.251	.131	.038	.246	.129	.038	.237	.126	.038	.229	.123	.037	.221	.120	.037	
5.0	.232	.118	.034	.227	.117	.034	.219	.114	.034	.212	.112	.033	.205	.109	.033	
6.0	.215	.108	.031	.211	.106	.031	.204	.104	.030	.197	.102	.030	.190	.100	.030	
7.0	.200	.099	.028	.196	.098	.028	.190	.096	.028	.184	.094	.027	.178	.092	.027	
8.0	.186	.091	.026	.183	.090	.025	.177	.089	.025	.172	.087	.025	.167	.086	.025	
9.0	.174	.084	.024	.172	.084	.023	.167	.082	.023	.162	.081	.023	.157	.080	.023	
10.0	.164	.079	.022	.161	.078	.022	.157	.077	.022	.152	.076	.022	.148	.075	.021	

$\rho_{CC}$	80%			70%			50%			30%			10%			0
$\rho_w$	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
$\rho_{fc}$	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.181	.156	.134	.155	.134	.115	.106	.092	.080	.061	.053	.046	.020	.017	.015	
2.0	.173	.132	.097	.148	.114	.084	.101	.079	.059	.059	.046	.034	.019	.015	.011	
3.0	.165	.114	.074	.142	.099	.064	.097	.069	.045	.056	.040	.026	.018	.013	.009	
4.0	.157	.101	.058	.135	.087	.050	.093	.061	.035	.054	.036	.021	.017	.012	.007	
5.0	.150	.091	.047	.129	.078	.041	.089	.055	.029	.051	.032	.017	.017	.010	.006	
6.0	.143	.082	.039	.123	.071	.034	.085	.050	.024	.049	.029	.014	.016	.010	.005	
7.0	.136	.075	.033	.117	.065	.029	.081	.046	.020	.047	.027	.012	.015	.009	.004	
8.0	.129	.070	.029	.111	.060	.025	.077	.042	.018	.045	.025	.011	.014	.008	.003	
9.0	.123	.065	.025	.106	.056	.022	.073	.039	.016	.043	.023	.009	.014	.008	.003	
10.0	.117	.060	.022	.101	.052	.020	.070	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2024-11-12

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.401m [K=1.0000]  
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:230.42V I:0.0885A P:11.589W PF:0.5683 Freq:50.00Hz										
Lamp Flux:1050.99x1 lm										
NAME:			TYPE:				WEIGHT:			
SPEC.: 白光			DIM.:				SERIAL No.:			
MFR.: EVERFINE			SUR.:				Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	17.6	19.1	17.8	19.3	19.5	16.8	18.3	17.1	18.6	18.8
3H	19.4	20.8	19.7	21.0	21.3	18.3	19.8	18.6	20.0	20.2
4H	20.2	21.5	20.5	21.8	22.0	18.9	20.3	19.3	20.6	20.8
6H	20.9	22.2	21.2	22.4	22.7	19.4	20.7	19.7	20.9	21.2
8H	21.2	22.4	21.5	22.7	23.0	19.5	20.8	19.9	21.1	21.4
12H	21.5	22.7	21.8	23.0	23.3	19.6	20.8	20.0	21.1	21.4
4H 2H	18.1	19.5	18.5	19.8	20.0	17.6	18.9	17.9	19.2	19.4
3H	20.1	21.3	20.5	21.6	21.9	19.3	20.5	19.7	20.8	21.1
4H	21.1	22.2	21.5	22.5	22.9	20.1	21.1	20.4	21.5	21.8
6H	22.0	23.0	22.4	23.3	23.7	20.7	21.6	21.1	22.0	22.3
8H	22.4	23.3	22.8	23.6	24.0	20.9	21.8	21.3	22.1	22.5
12H	22.7	23.6	23.2	24.0	24.4	21.0	21.8	21.4	22.2	22.6
8H 4H	21.4	22.3	21.8	22.7	23.1	20.5	21.4	20.9	21.7	22.1
6H	22.5	23.2	22.9	23.6	24.0	21.3	22.0	21.7	22.4	22.9
8H	23.0	23.6	23.4	24.1	24.5	21.6	22.3	22.1	22.7	23.1
12H	23.5	24.1	24.0	24.5	25.0	21.8	22.4	22.3	22.9	23.3
12H 4H	21.4	22.2	21.8	22.6	23.0	20.5	21.4	21.0	21.8	22.2
6H	22.5	23.2	23.0	23.6	24.1	21.4	22.1	21.9	22.5	23.0
8H	23.1	23.7	23.6	24.1	24.6	21.8	22.4	22.3	22.8	23.3
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				
2.0H	+ 0.1 / - 0.3					+ 0.2 / - 0.4				

CIE Pub.117, 1051 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 0.2)  
 Area: 0.1 m2

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2024-11-12

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.401m [K=1.0000]  
 Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:230.42V I:0.0885A P:11.589W PF:0.5683 Freq:50.00Hz Lamp Flux:1050.99x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 白光	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	46	39	57	45	39	55	45	38	32
0.80	67	56	48	66	55	48	64	54	48	41
1.00	76	64	57	74	64	57	72	65	56	49
1.25	83	72	65	81	71	64	79	70	64	56
1.50	88	78	71	86	77	70	83	75	69	61
2.00	95	86	79	93	85	78	89	82	77	69
2.50	98	91	84	96	89	83	93	86	82	73
3.00	102	95	89	100	93	88	96	90	86	77
4.00	106	100	95	103	98	94	99	95	91	82
5.00	108	103	99	106	101	98	101	98	95	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2024-11-12

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.401m [K=1.0000]  
 Remarks:

ISOCANDELA DIAGRAM

Test:U:230.42V I:0.0885A P:11.589W PF:0.5683 Freq:50.00Hz Lamp Flux:1050.99x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 白光	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

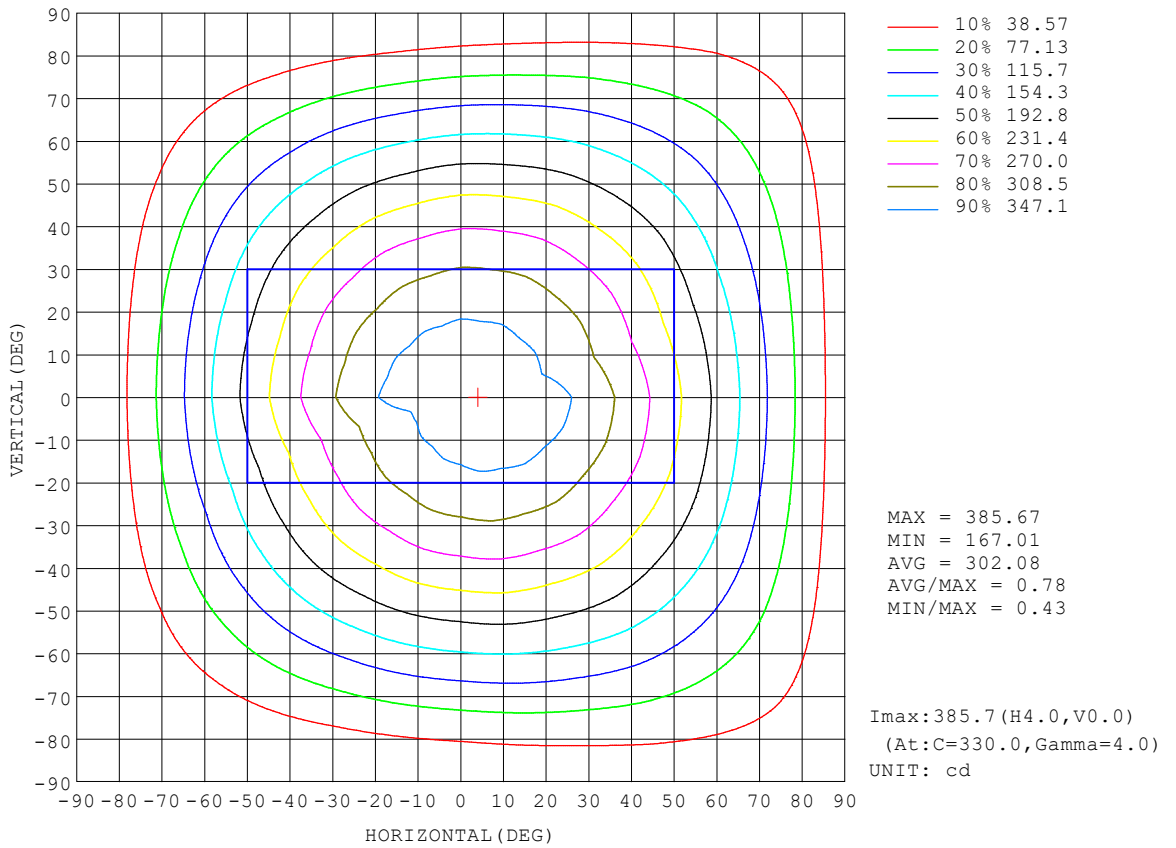


C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators: DAMIN  
 Test Date: 2024-11-12

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity: 65.0%  
 Test Distance: 9.401m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:230.42V I:0.0885A P:11.589W PF:0.5683 Freq:50.00Hz Lamp Flux:1050.99x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 白光	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

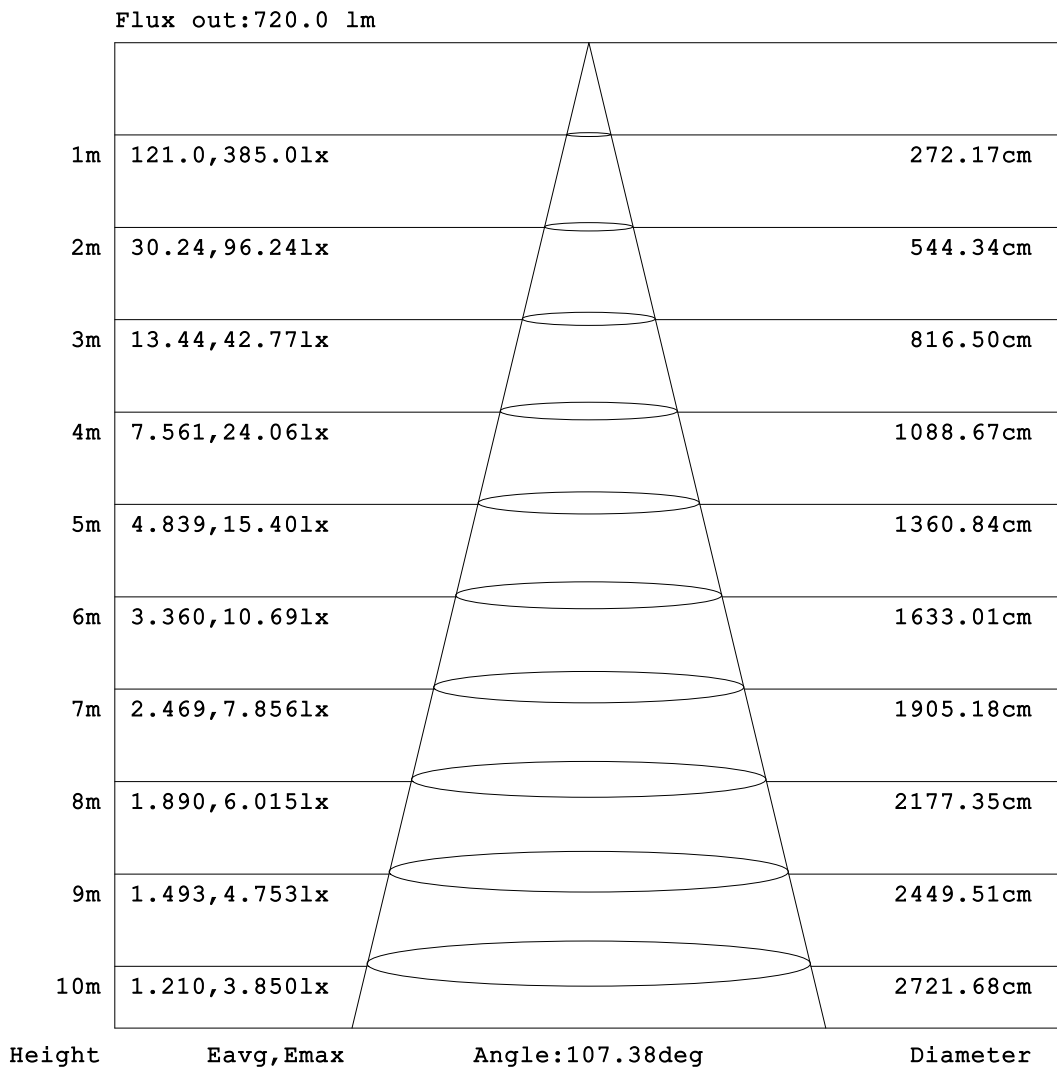


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature:25.3°C  
Operators:DAMIN  
Test Date:2024-11-12

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
Humidity:65.0%  
Test Distance:9.401m [K=1.0000]  
Remarks:

**ISOLUX DIAGRAM**

Test:U:230.42V I:0.0885A P:11.589W PF:0.5683 Freq:50.00Hz Lamp Flux:1050.99x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 白光	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

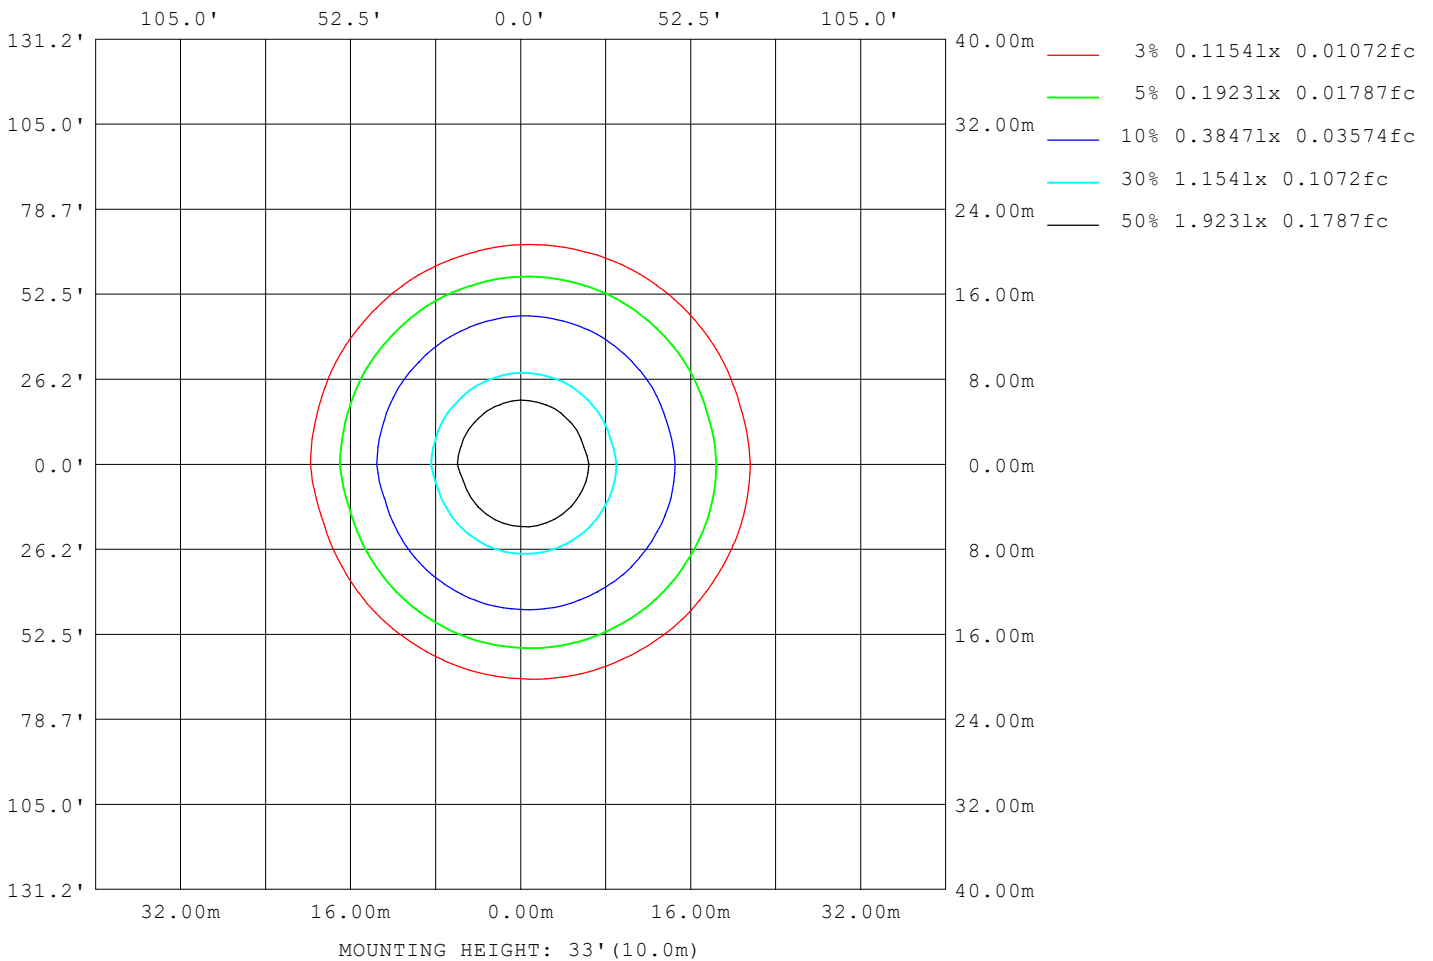

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2024-11-12

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.401m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:230.42V I:0.0885A P:11.589W PF:0.5683 Freq:50.00Hz Lamp Flux:1050.99x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 白光	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	3088
L_0~180 (75) av	2841
L_0~180 (85) av	2836
L_90~270 (65) av	3080
L_90~270 (75) av	2829
L_90~270 (85) av	2556
L_45 (65) av	3087
L_45 (75) av	2841
L_45 (85) av	2722

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2024-11-12

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.401m [K=1.0000]  
 Remarks:

**Planar Illuminance Curve**

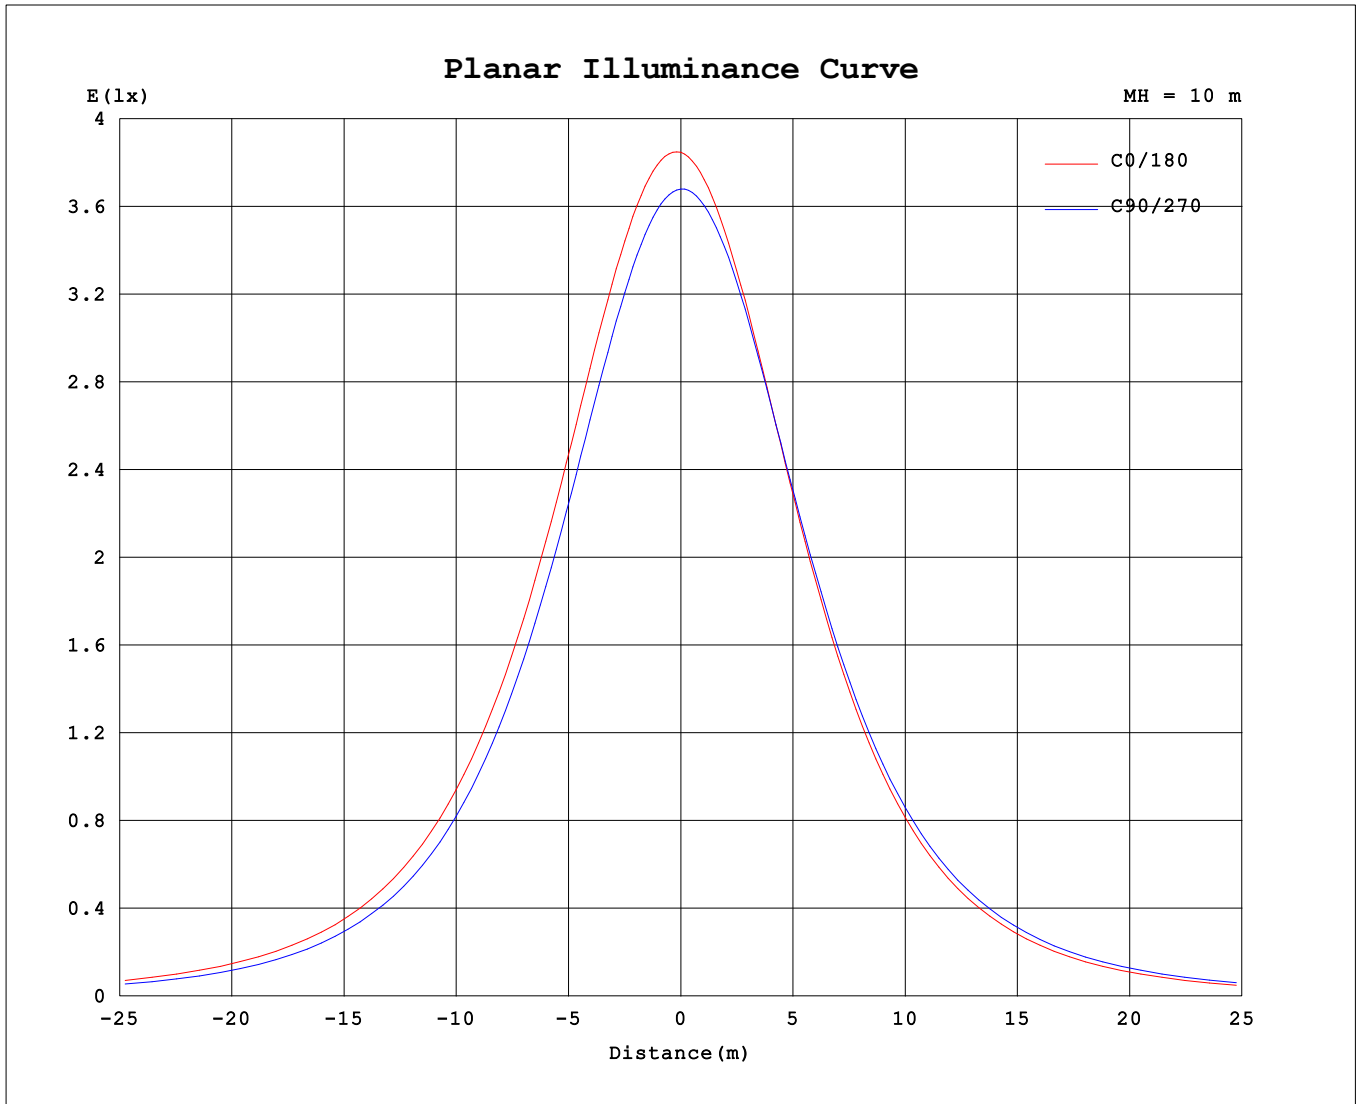

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators: DAMIN  
 Test Date: 2024-11-12

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity: 65.0%  
 Test Distance: 9.401m [K=1.0000]  
 Remarks:



